
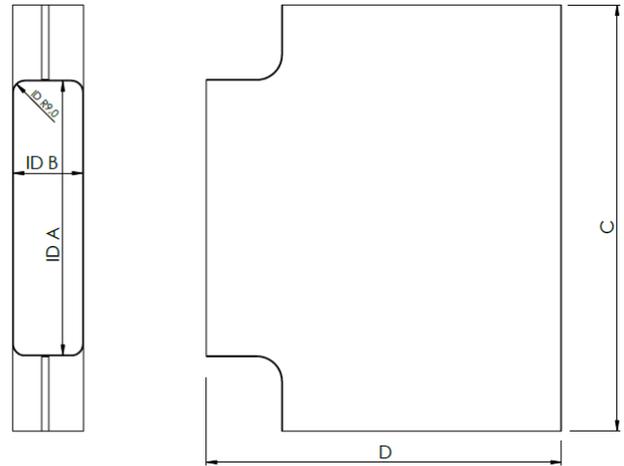


# QUADRODEC®

## Quadrodec® T-piece rectangular 90° 250x80mm

Order code: **QDTFFF250X80**

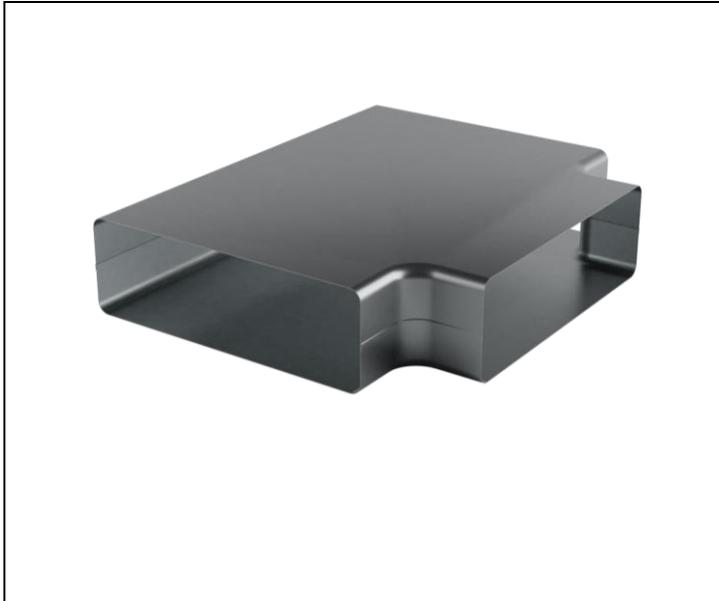

ID A	ID B	C	D
mm	mm	mm	mm
250	80	372	312
±0,5	±0,5		

### Description


Horizontal T-piece, 3-sides rectangular female connection.

Connection: Female/Female/Female  
Material: DX53D, Zinc plated 275g/m<sup>2</sup>  
EN ISO 9227:2006

### Classification

EN 13501-1:2018: Class A1  
EN 12237: Leakage Class D/(ATC2)  
Ansi Ashrae 120-2017: Pressure loss


### Leakage

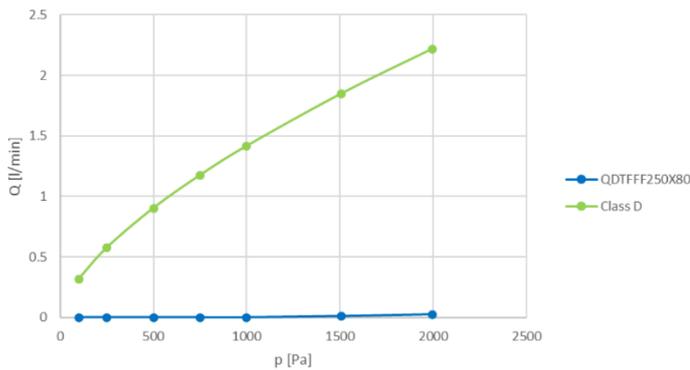

The rectangular side of this fitting is easy to install with our unique DEC® Safe connector **QDCMM220X80**.

Also available in 220X55mm.

### Pressure loss

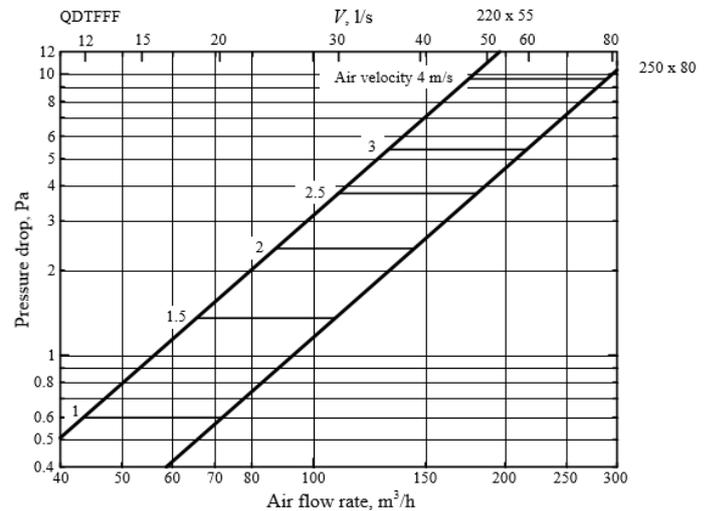

#### LIABILITY:

The information contained in this brochure was current on the publication date. DEC INTERNATIONAL reserves the right to make changes in details at any time without prior notice. In order to avoid misunderstandings, any interested party is advised to contact DEC INTERNATIONAL checking for any changes in materials and/or information after this brochure was published.

#### PLEASE NOTICE:

The consultant is responsible for the actual installation and mounting of the product. The mentioned values with respect to temperatures are not appropriate to be used to determine the physical properties. These properties are also dependent on humidity and the temperature of the air inside and outside of the H.V.A.C. system.

#### TRADEMARKS:

QUADRODEC, the DEC logo and DEC International are trademarks or registered trademarks of Dutch Environment Corporation BV in the Netherlands and/or other countries.

#### RESTRICTIONS:

The QUADRODEC ducts are not suitable for discharging combustion products from open fireplaces and oil-fired boilers. Neither are the ducts suitable for transporting air with a high concentration of acid and base.

